High Noon DxP Stewardship Contract Area Map
Newport Ranger District, Colville National Forest

1:12,000

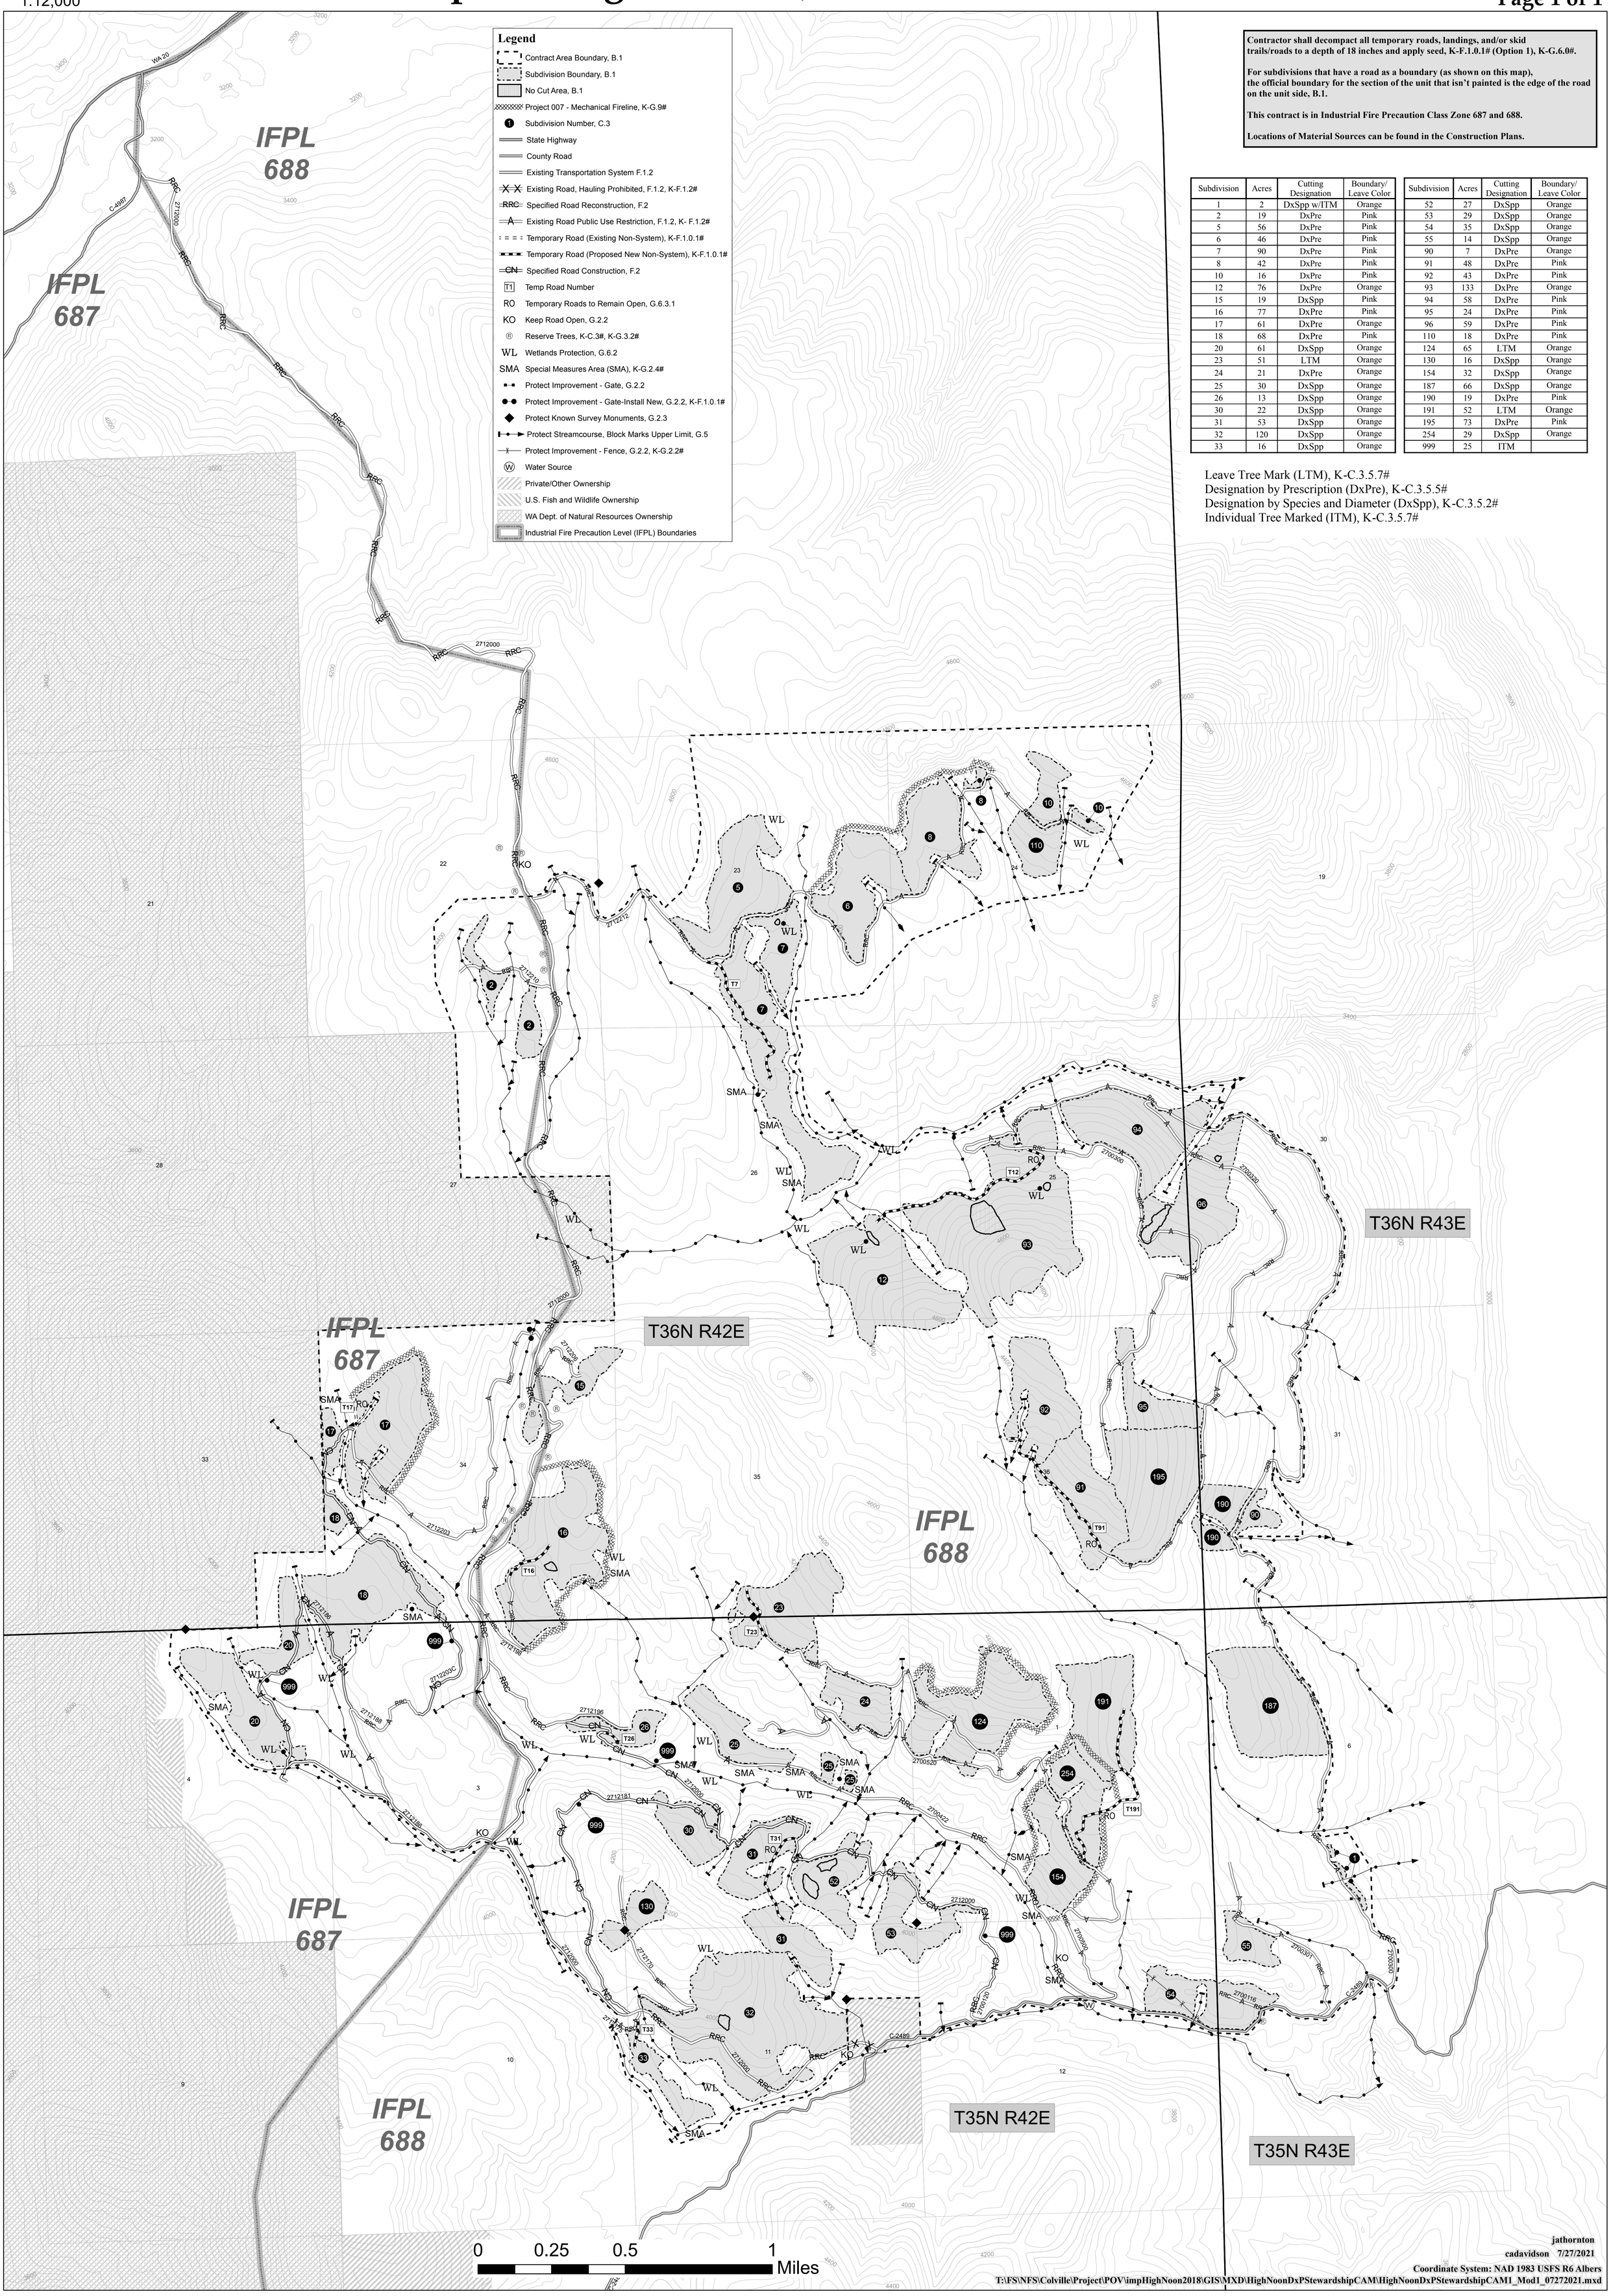

Contractor shall decompact all temporary roads, landings, and/or skid trails/roads to a depth of 18 inches and apply seed, K-F.1.0.1# (Option 1), K-G.6.0#.

For subdivisions that have a road as a boundary (as shown on this map), the official boundary for the section of the unit that isn't painted is the edge of the road on the unit side, B.1.

This contract is in Industrial Fire Precaution Class Zone 687 and 688.

Locations of Material Sources can be found in the Construction Plans.

Subdivision	Acres	Cutting Designation	Boundary/ Leave Color
1	2	DxSpp w/ITM	Orange
2	19	DxPre	Pink
5	56	DxPre	Pink
6	46	DxPre	Pink
7	90	DxPre	Pink
8	42	DxPre	Pink
10	16	DxPre	Pink
12	76	DxPre	Orange
15	19	DxSpp	Pink
16	77	DxPre	Pink
17	61	DxPre	Orange
18	68	DxPre	Pink
20	61	DxSpp	Orange
23	51	LTM	Orange
24	21	DxPre	Orange
25	30	DxSpp	Orange
26	13	DxSpp	Orange
30	22	DxSpp	Orange
31	53	DxSpp	Orange
32	120	DxSpp	Orange
33	16	DxSpp	Orange

Subdivision	Acres	Cutting Designation	Boundary/ Leave Color
52	27	DxSpp	Orange
53	29	DxSpp	Orange
54	35	DxSpp	Orange
55	14	DxSpp	Orange
90	7	DxPre	Orange
91	48	DxPre	Pink
92	43	DxPre	Pink
93	133	DxPre	Orange
94	58	DxPre	Pink
95	24	DxPre	Pink
96	59	DxPre	Pink
110	18	DxPre	Pink
124	65	LTM	Orange
130	16	DxSpp	Orange
154	32	DxSpp	Orange
187	66	DxSpp	Orange
190	19	DxPre	Pink
191	52	LTM	Orange
195	73	DxPre	Pink
254	29	DxSpp	Orange
999	25	ITM	

Leave Tree Mark (LTM), K-C.3.5.7#
Designation by Prescription (DxPre), K-C.3.5.5#
Designation by Species and Diameter (DxSpp), K-C.3.5.2#
Individual Tree Marked (ITM), K-C.3.5.7#

jathornton
cadavidson 7/27/2021
Coordinate System: NAD 1983 USFS R6 Albers
T:\FS\NFS\Colville\Project\POV\impHighNoon2018\GIS\MXD\HighNoonDxPStewardshipCAM\HighNoonDxPStewardshipCAM1_Mod1_07272021.mxd